


Condenser Run Geared Motor IC-16TYPE

PAC중대형 실내기 MOTOR로 방진고무링 적용으로
고토크(출력)이며 소음특성이 유리



DIMENSIONS

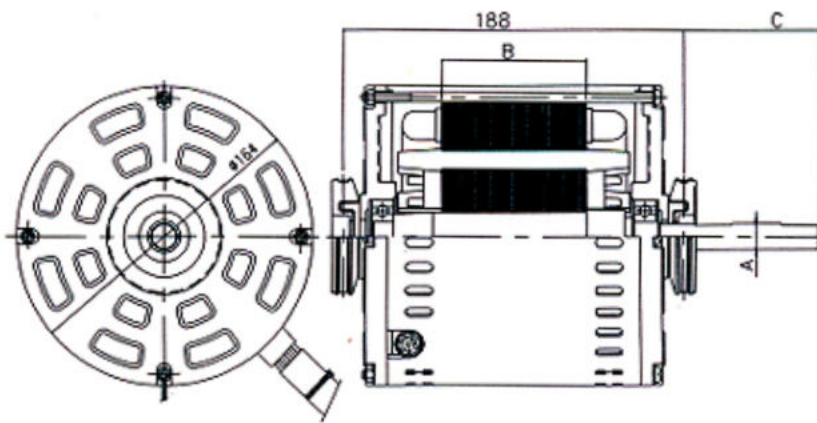

CHARACTERISTICS

TYPE	NO LOAD						DIMENSION			INS. CLASS
	V	Hz	Pi(W)	RPM	TORQUE(kg.cm)		(A) (φ)	(B) (mm)	(C) (mm)	
					MAXIMUM TORQUE	STARTING TORQUE				
16660	110~240	>0	175~600	950~980	25~90	10~30	φ 12 φ 15 φ 17 φ 22	60		E,B
16660		60	175~600	1150~1180	25~90	10~30		60		E,B
16680		50	180~800	950~980	30~95	15~40		80		E,B
16680		60	190~850	1150~1180	35~100	15~40		80		E,B
16880		50	250~600	950~980	50~90	25~30		80		E,B
16880		60	250~620	1150~1180	50~95	25~35		80		E,B