

SMALL DC GEARED MOTOR MG-RR2412M




제품사진



DIMENSIONS

CONTROL POINT

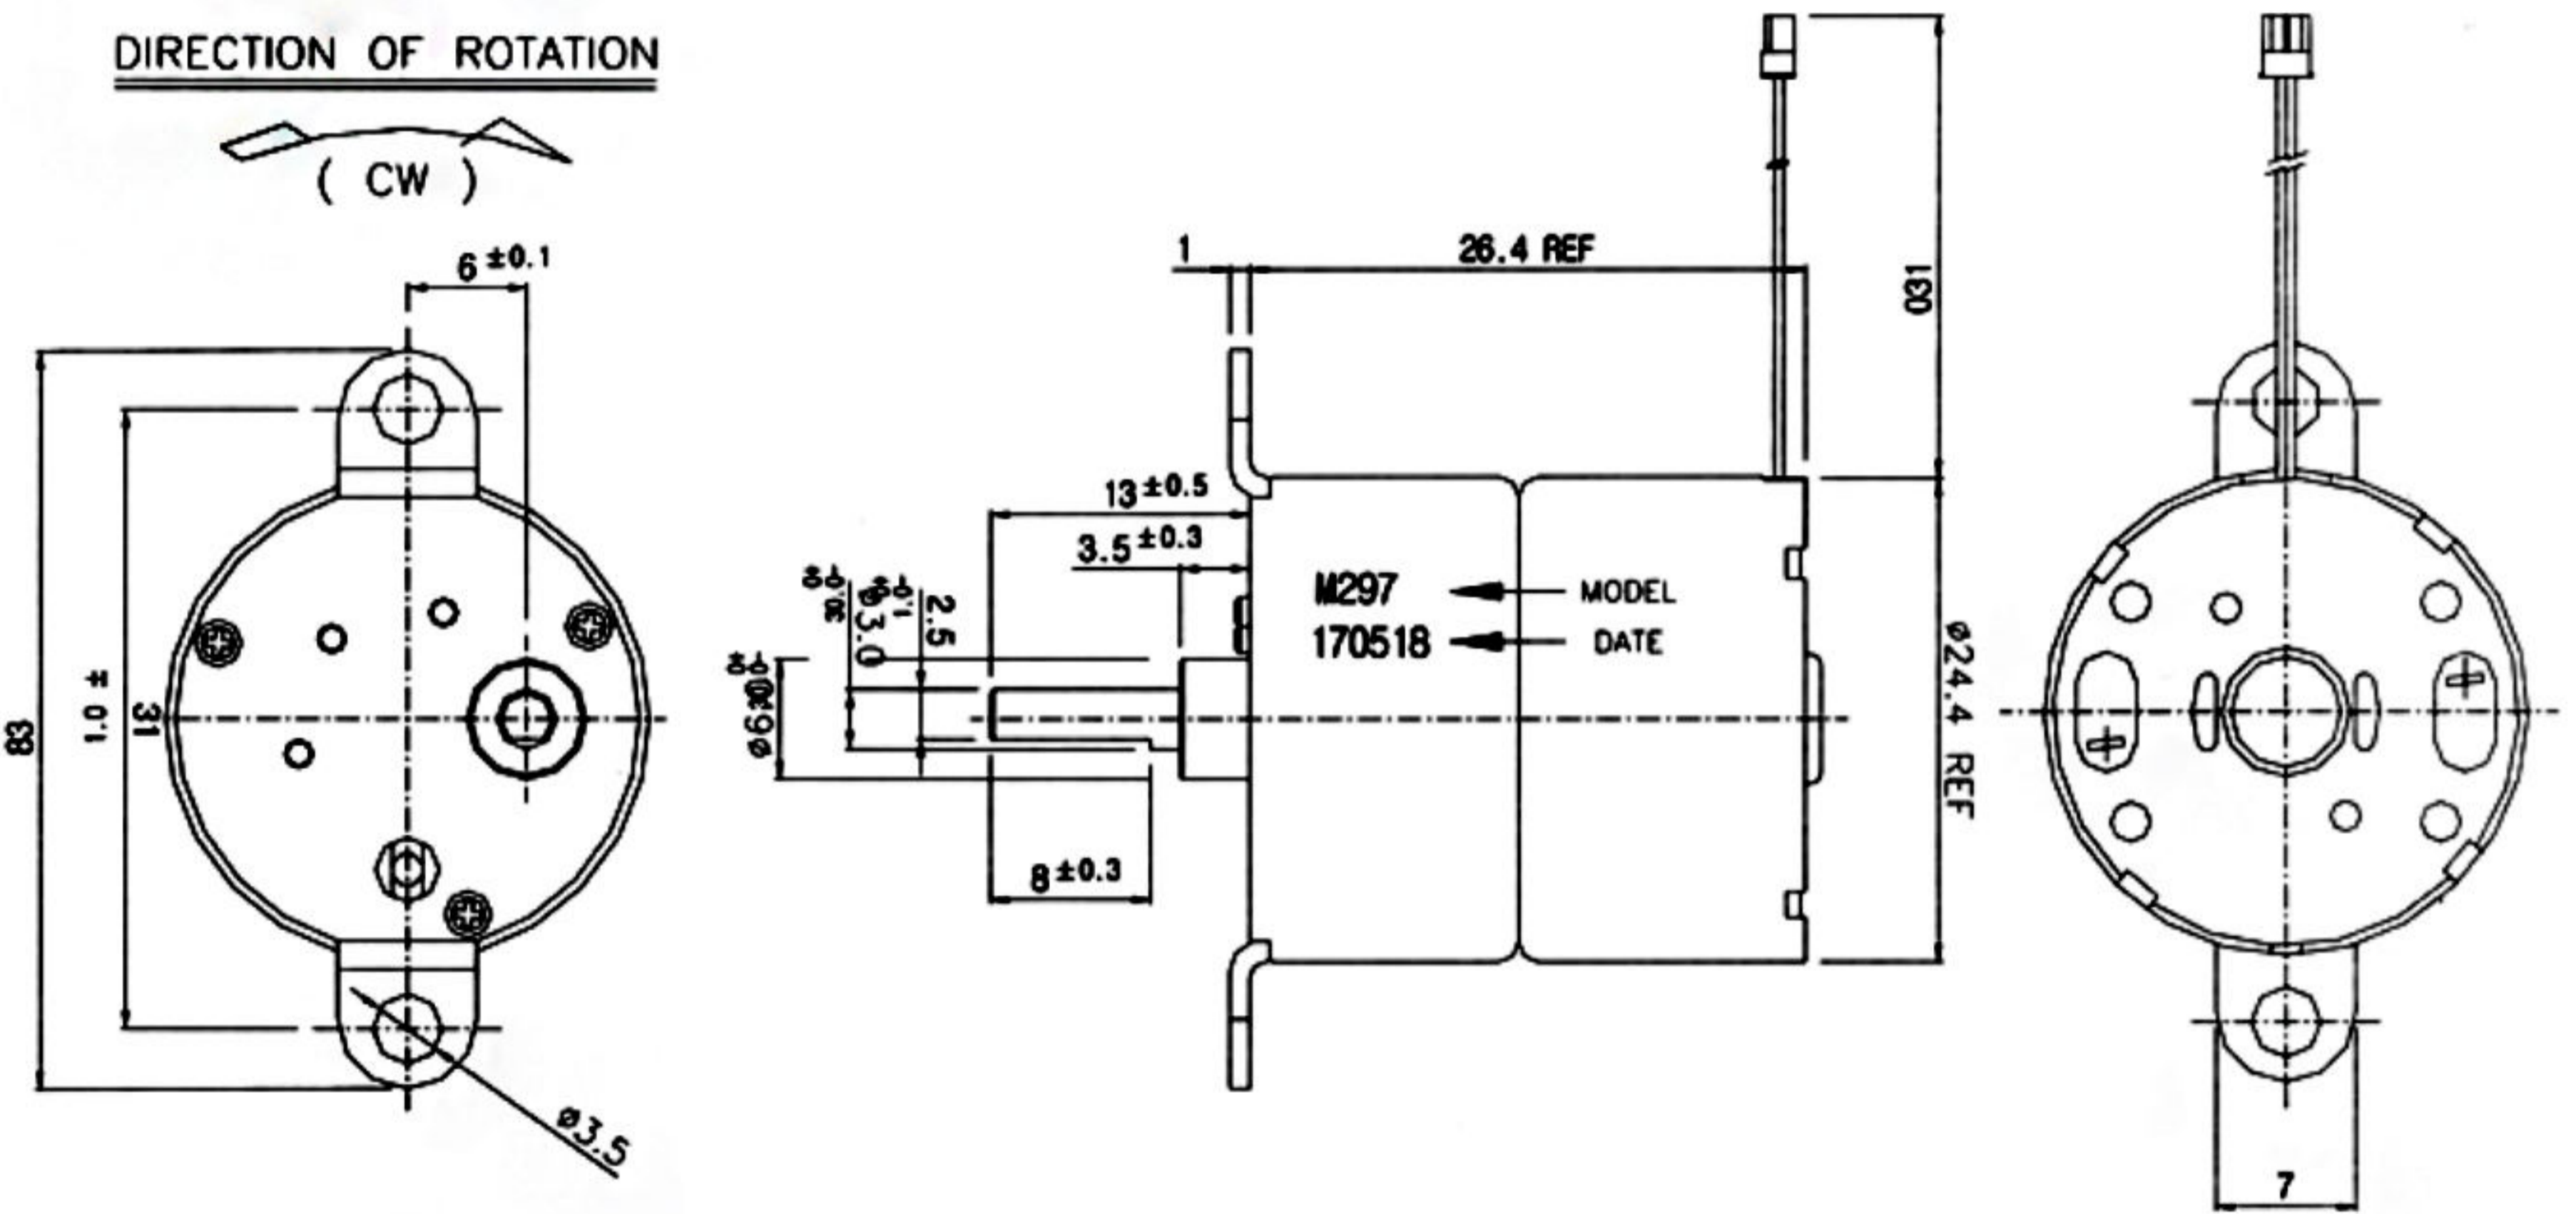

SPECIFICATION

MG-RR2412M (DC 3.0V)		
정격 전압 Rated Voltage	DC 3.0	(V)
사용전압 범위 Operating Voltage	DC 2.5~3.5	(V)
정격부하 Rated Load	200	(g-cm)
정격부하 전류 Rated Load Current	60	(mA Max)
기동 토크 Starting Torque	2000	(g-cm)
기동 전류 Starting Current	180	(mA Max)

MOTOR PERFORMANCE DATA

DRAW-NO	P/NAME	MATERIAL, REMARKS, FINISH
MG-RR2412N297	MOTOR ASS'Y	DC 3.0V, No Load Speed 6.5rpm
MG-RR2412M297	MOTOR ASS'Y	DC 3.0V, No Load Speed 9.5rpm
MG-RR2412M87	MOTOR ASS'Y	DC 3.0V, No Load Speed 33rpm
MG-RR2412M32	MOTOR ASS'Y	DC 3.0V, No Load Speed 88rpm