

Thermal Protection

60mm square x 15mm




제품사진



특징

- 60mm x 60mm x 15mm frame size
- Thermal protection type
- Rib type housing
- UL/CUL/CSA/TUV 안전인증 취득
- 저소음과 저전력소모 Design
- 2 Ball Bearings 구조
- Tachometer and/or Locked Rotor Output Option외에 고객요구 Option 충족가능

외형도

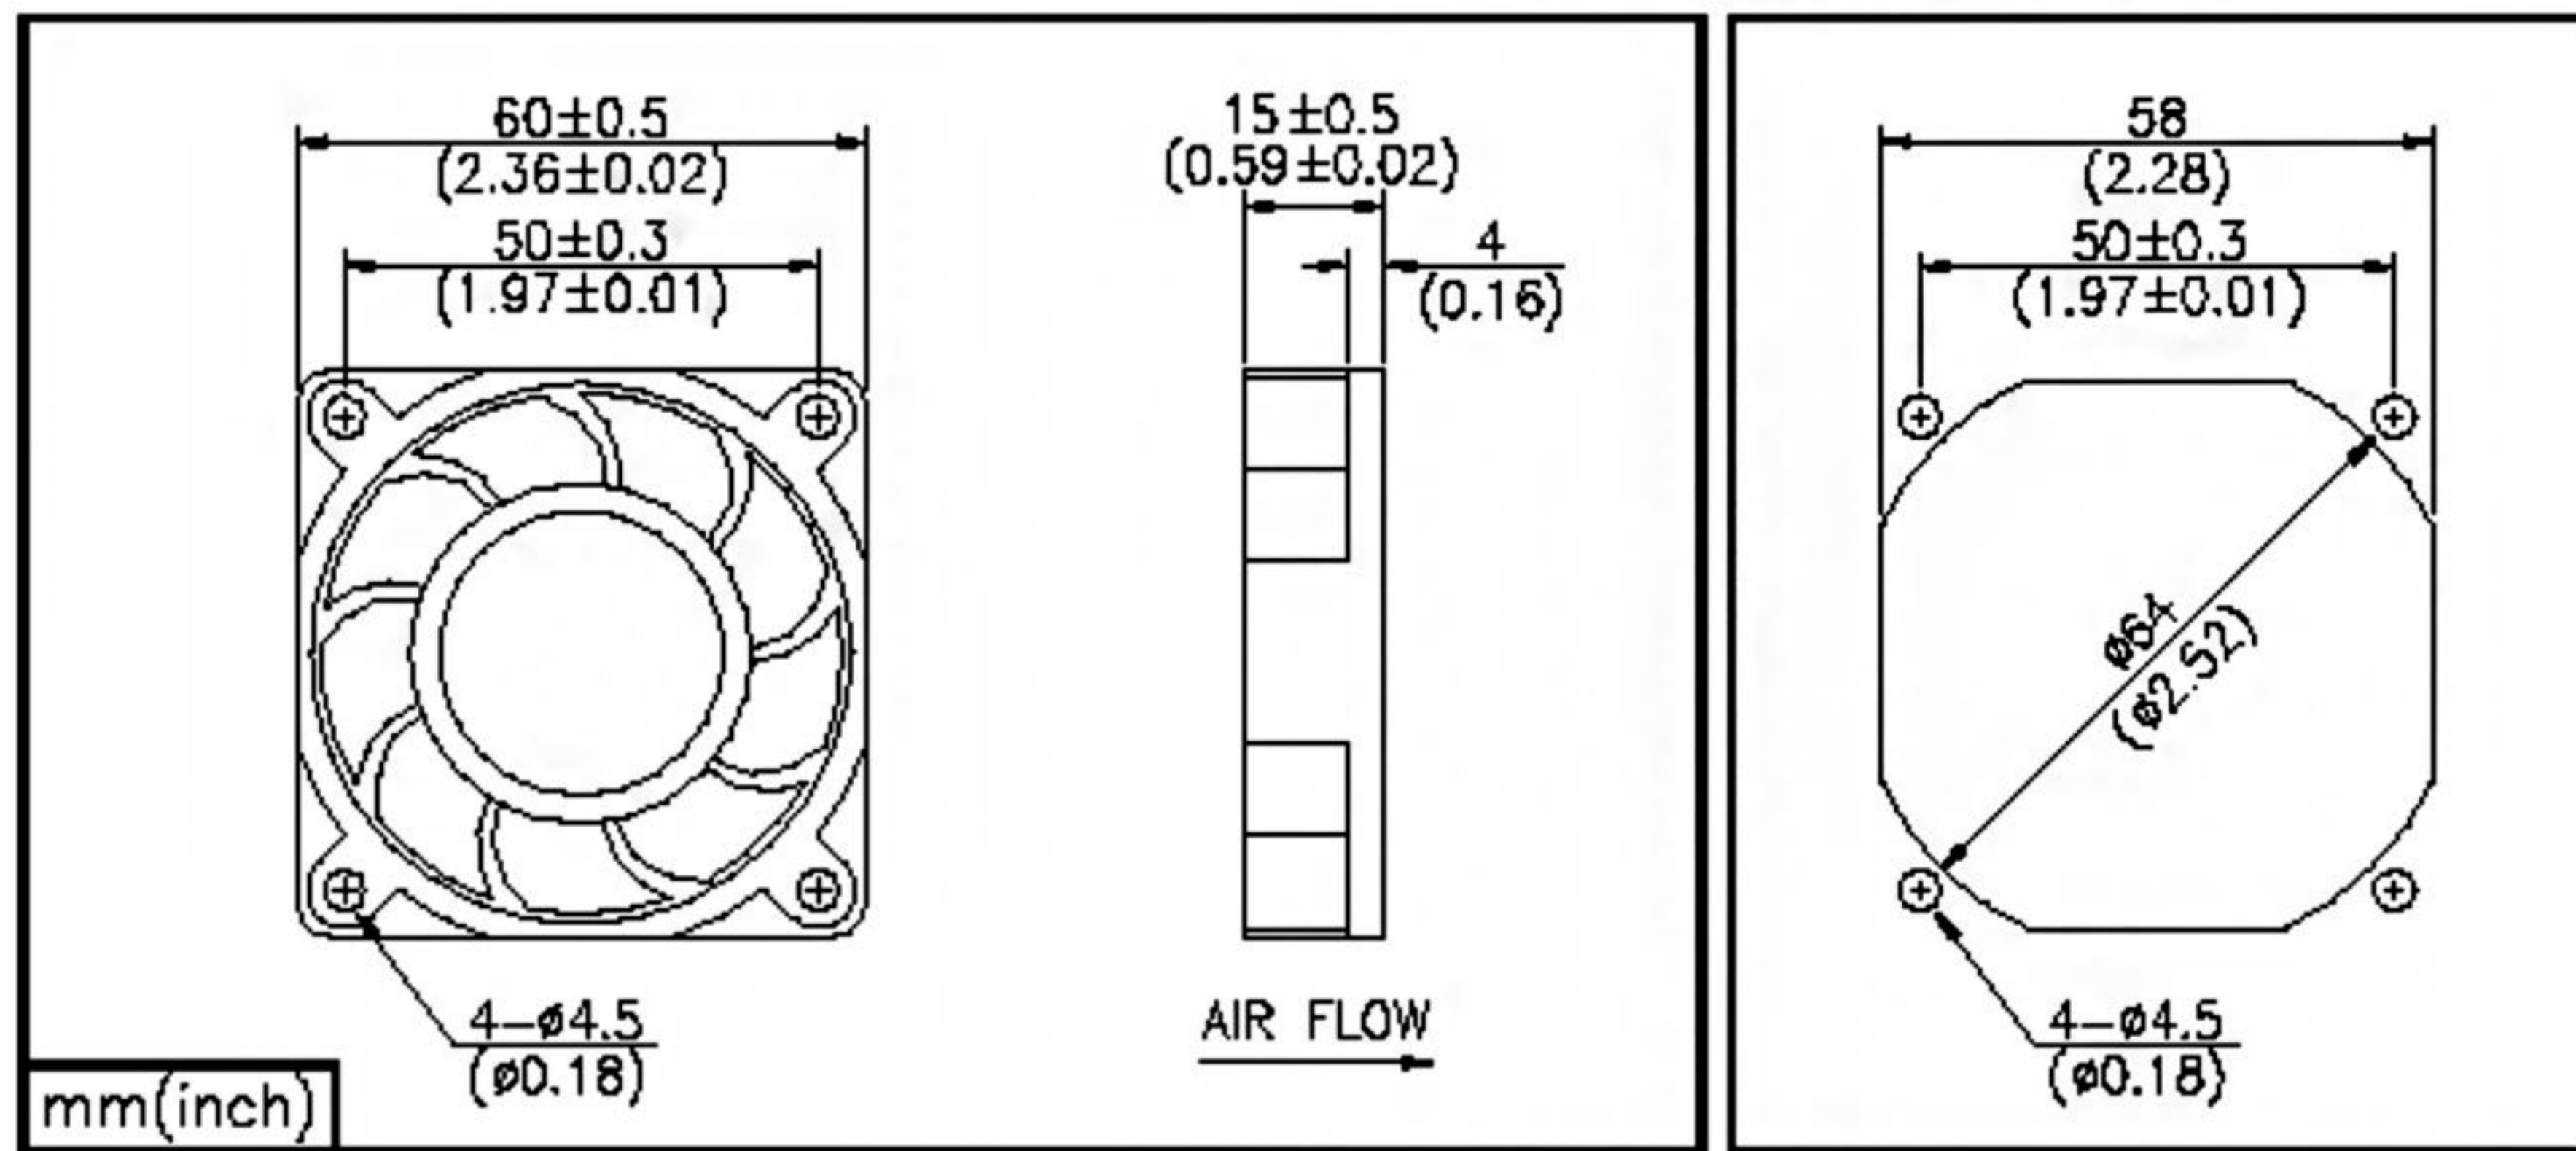

SPECIFICATION

Model	Voltage [VDC]	Start Voltage [VDC]	Current [mA]	Power [W]	Speed [rpm+/-10%]	Air Flow [m3/min]/[CFM]	Static Pressure[mmH2O] /[inH2O]	Sound Noise [dBA]
G6015S05	5	4	190	0.95	2,800	0.33 / 12	2.45 / 0.10	22
G6015L05	5	4	240	1.20	3,400	0.39 / 14	3.34 / 0.13	26
G6015M05	5	4	280	1.40	4,000	0.46 / 16	4.27 / 0.17	30
G6015H05	5	4	360	1.8	4,600	0.52 / 18	5.35 / 0.21	33
G6015E05	5	4	430	2.15	5,200	0.58 / 20	6.51 / 0.26	36
G6015S12	12	8	80	0.96	2,800	0.33 / 12	2.45 / 0.10	22
G6015L12	12	8	100	1.2	3,400	0.39 / 14	3.34 / 0.13	26
G6015M12	12	8	120	1.44	4,000	0.46 / 16	4.27 / 0.17	30
G6015H12	12	8	150	1.8	4,600	0.52 / 18	5.35 / 0.21	33
G6015E12	12	8	180	2.16	5,200	0.58 / 20	6.51 / 0.26	36
G6015X12	12	8	250	3	5,800	0.63 / 22	7.58 / 0.30	39
G6015L24	24	18	70	1.68	3,400	0.39 / 14	3.34 / 0.13	26
G6015M24	24	15	80	1.92	4,000	0.46 / 16	4.27 / 0.17	30
G6015H24	24	15	100	2.4	4,600	0.52 / 18	5.35 / 0.21	33
G6015E24	24	15	130	3.12	5,200	0.58 / 20	6.51 / 0.26	36
G6015X24	24	15	170	4.08	5,800	0.63 / 22	7.58 / 0.30	39