



Synchronous Motor

NYM-36H

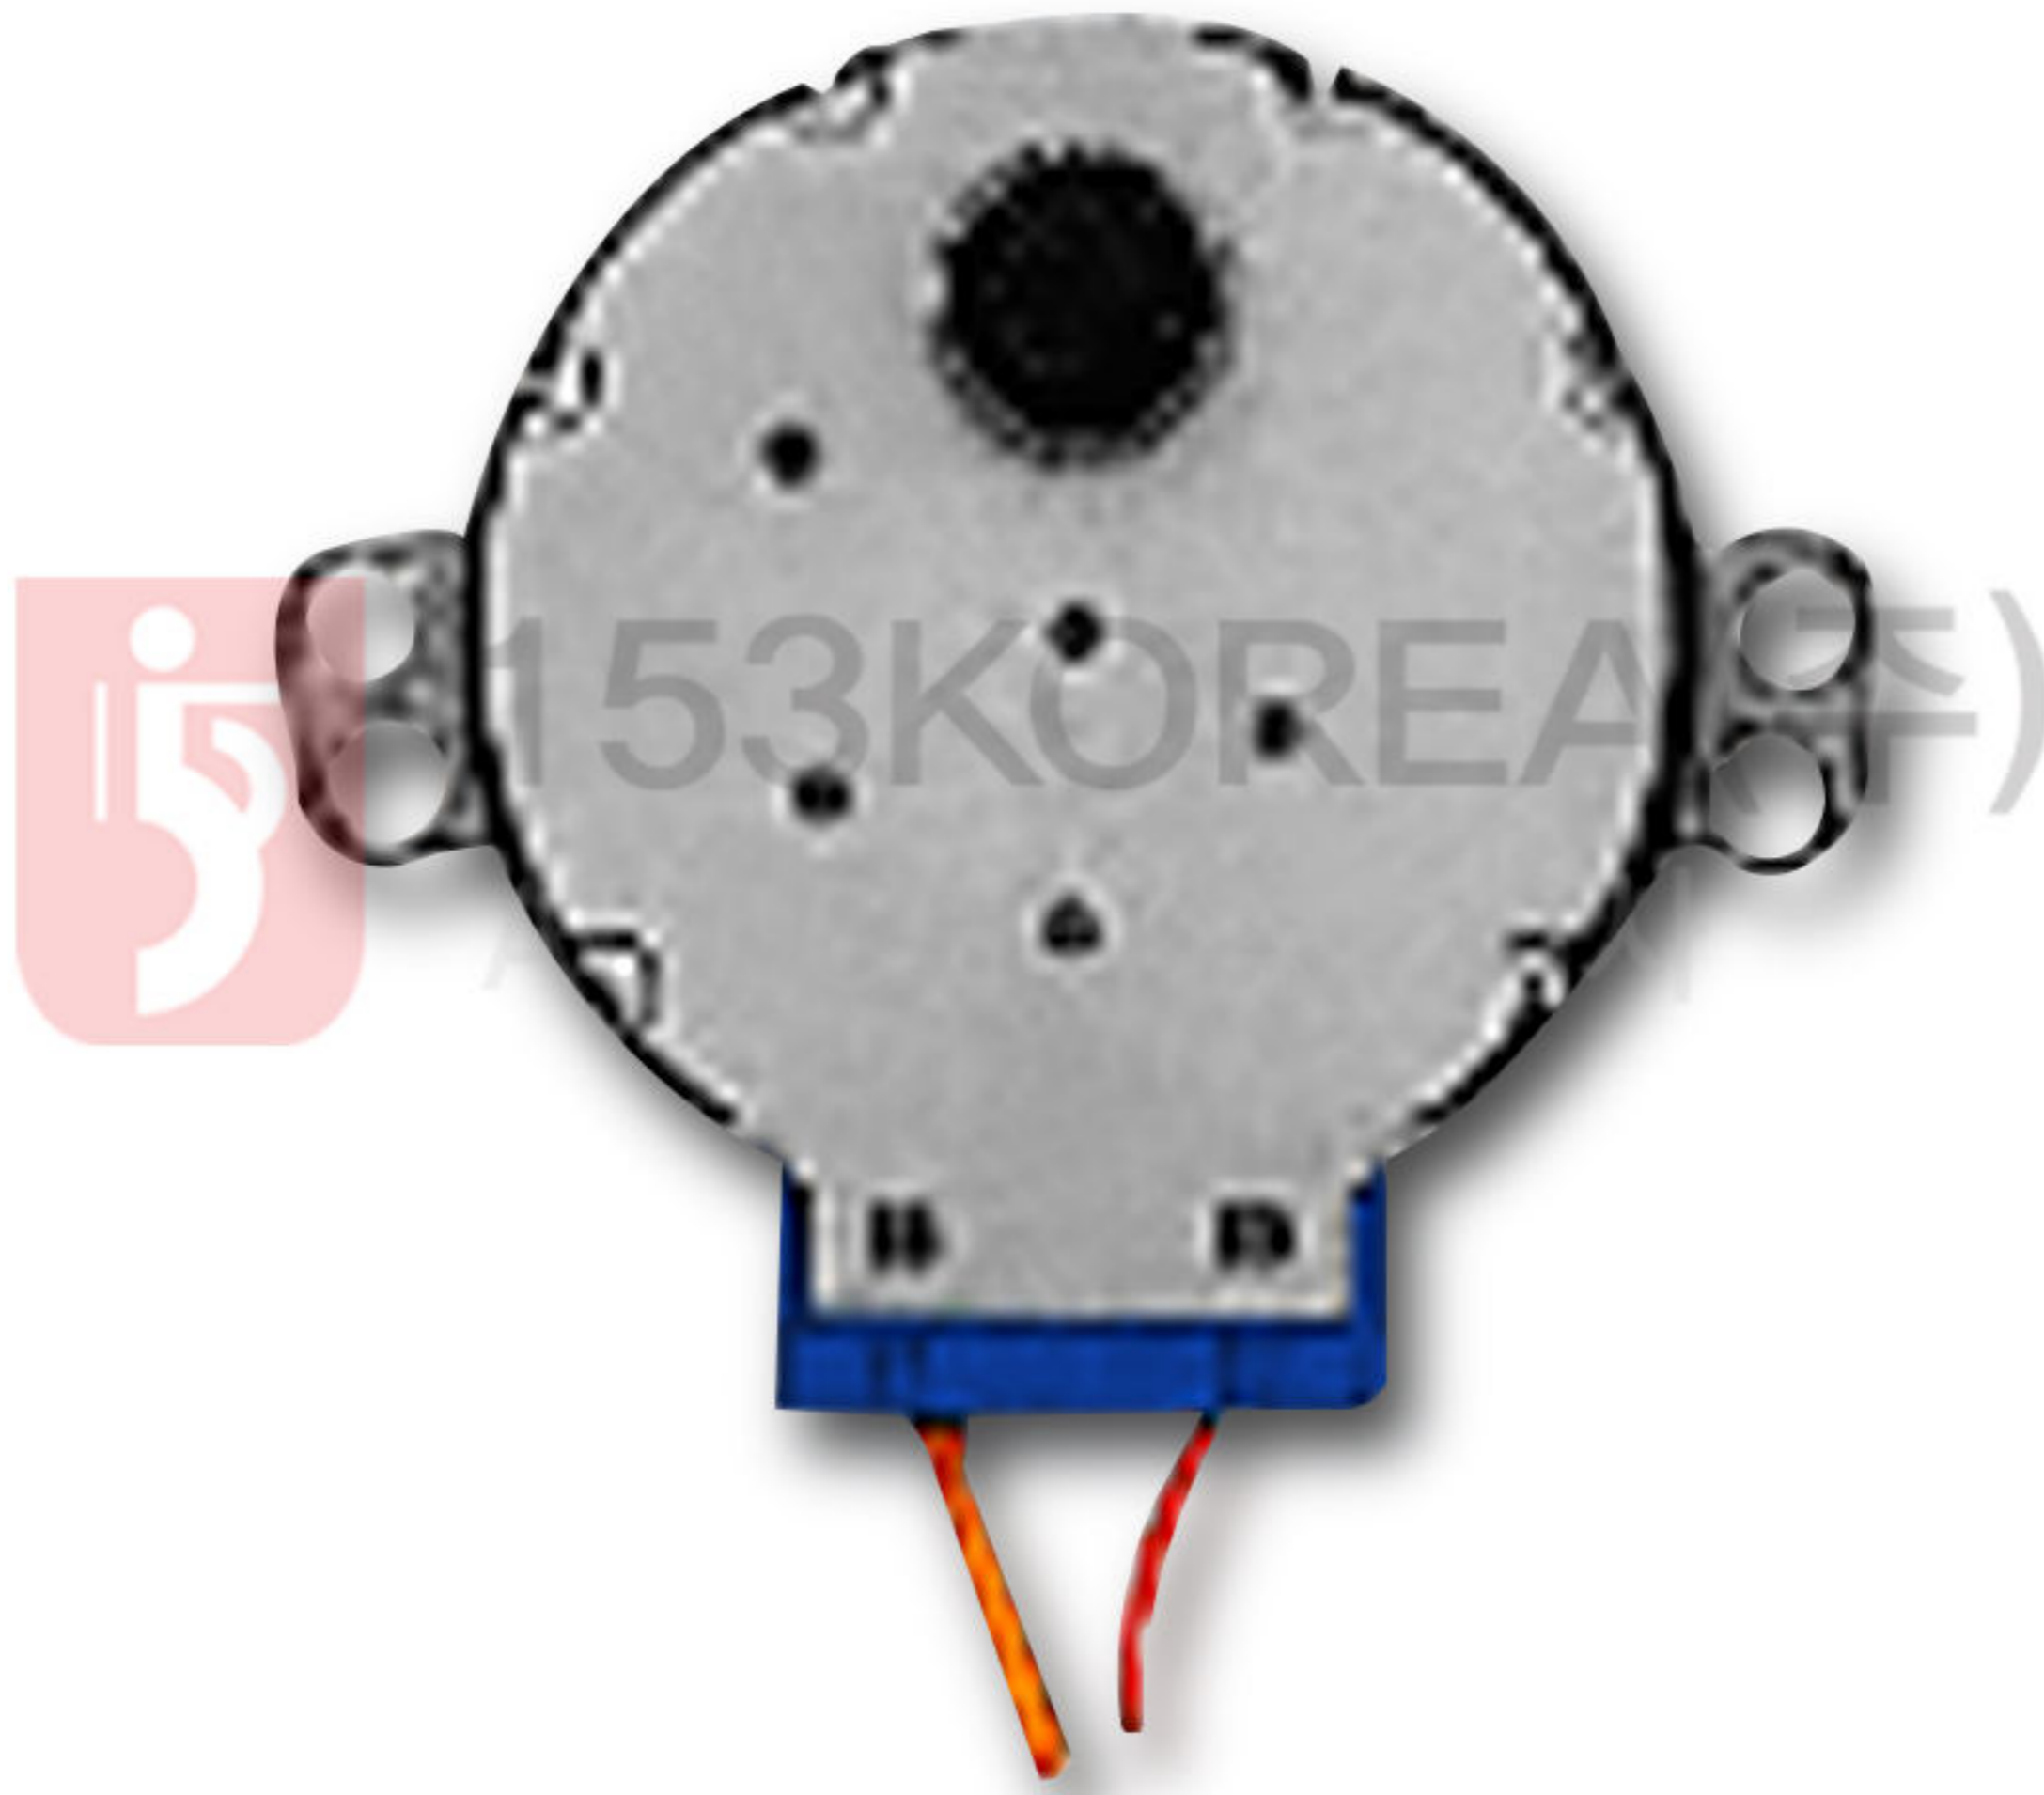

DIMENSION

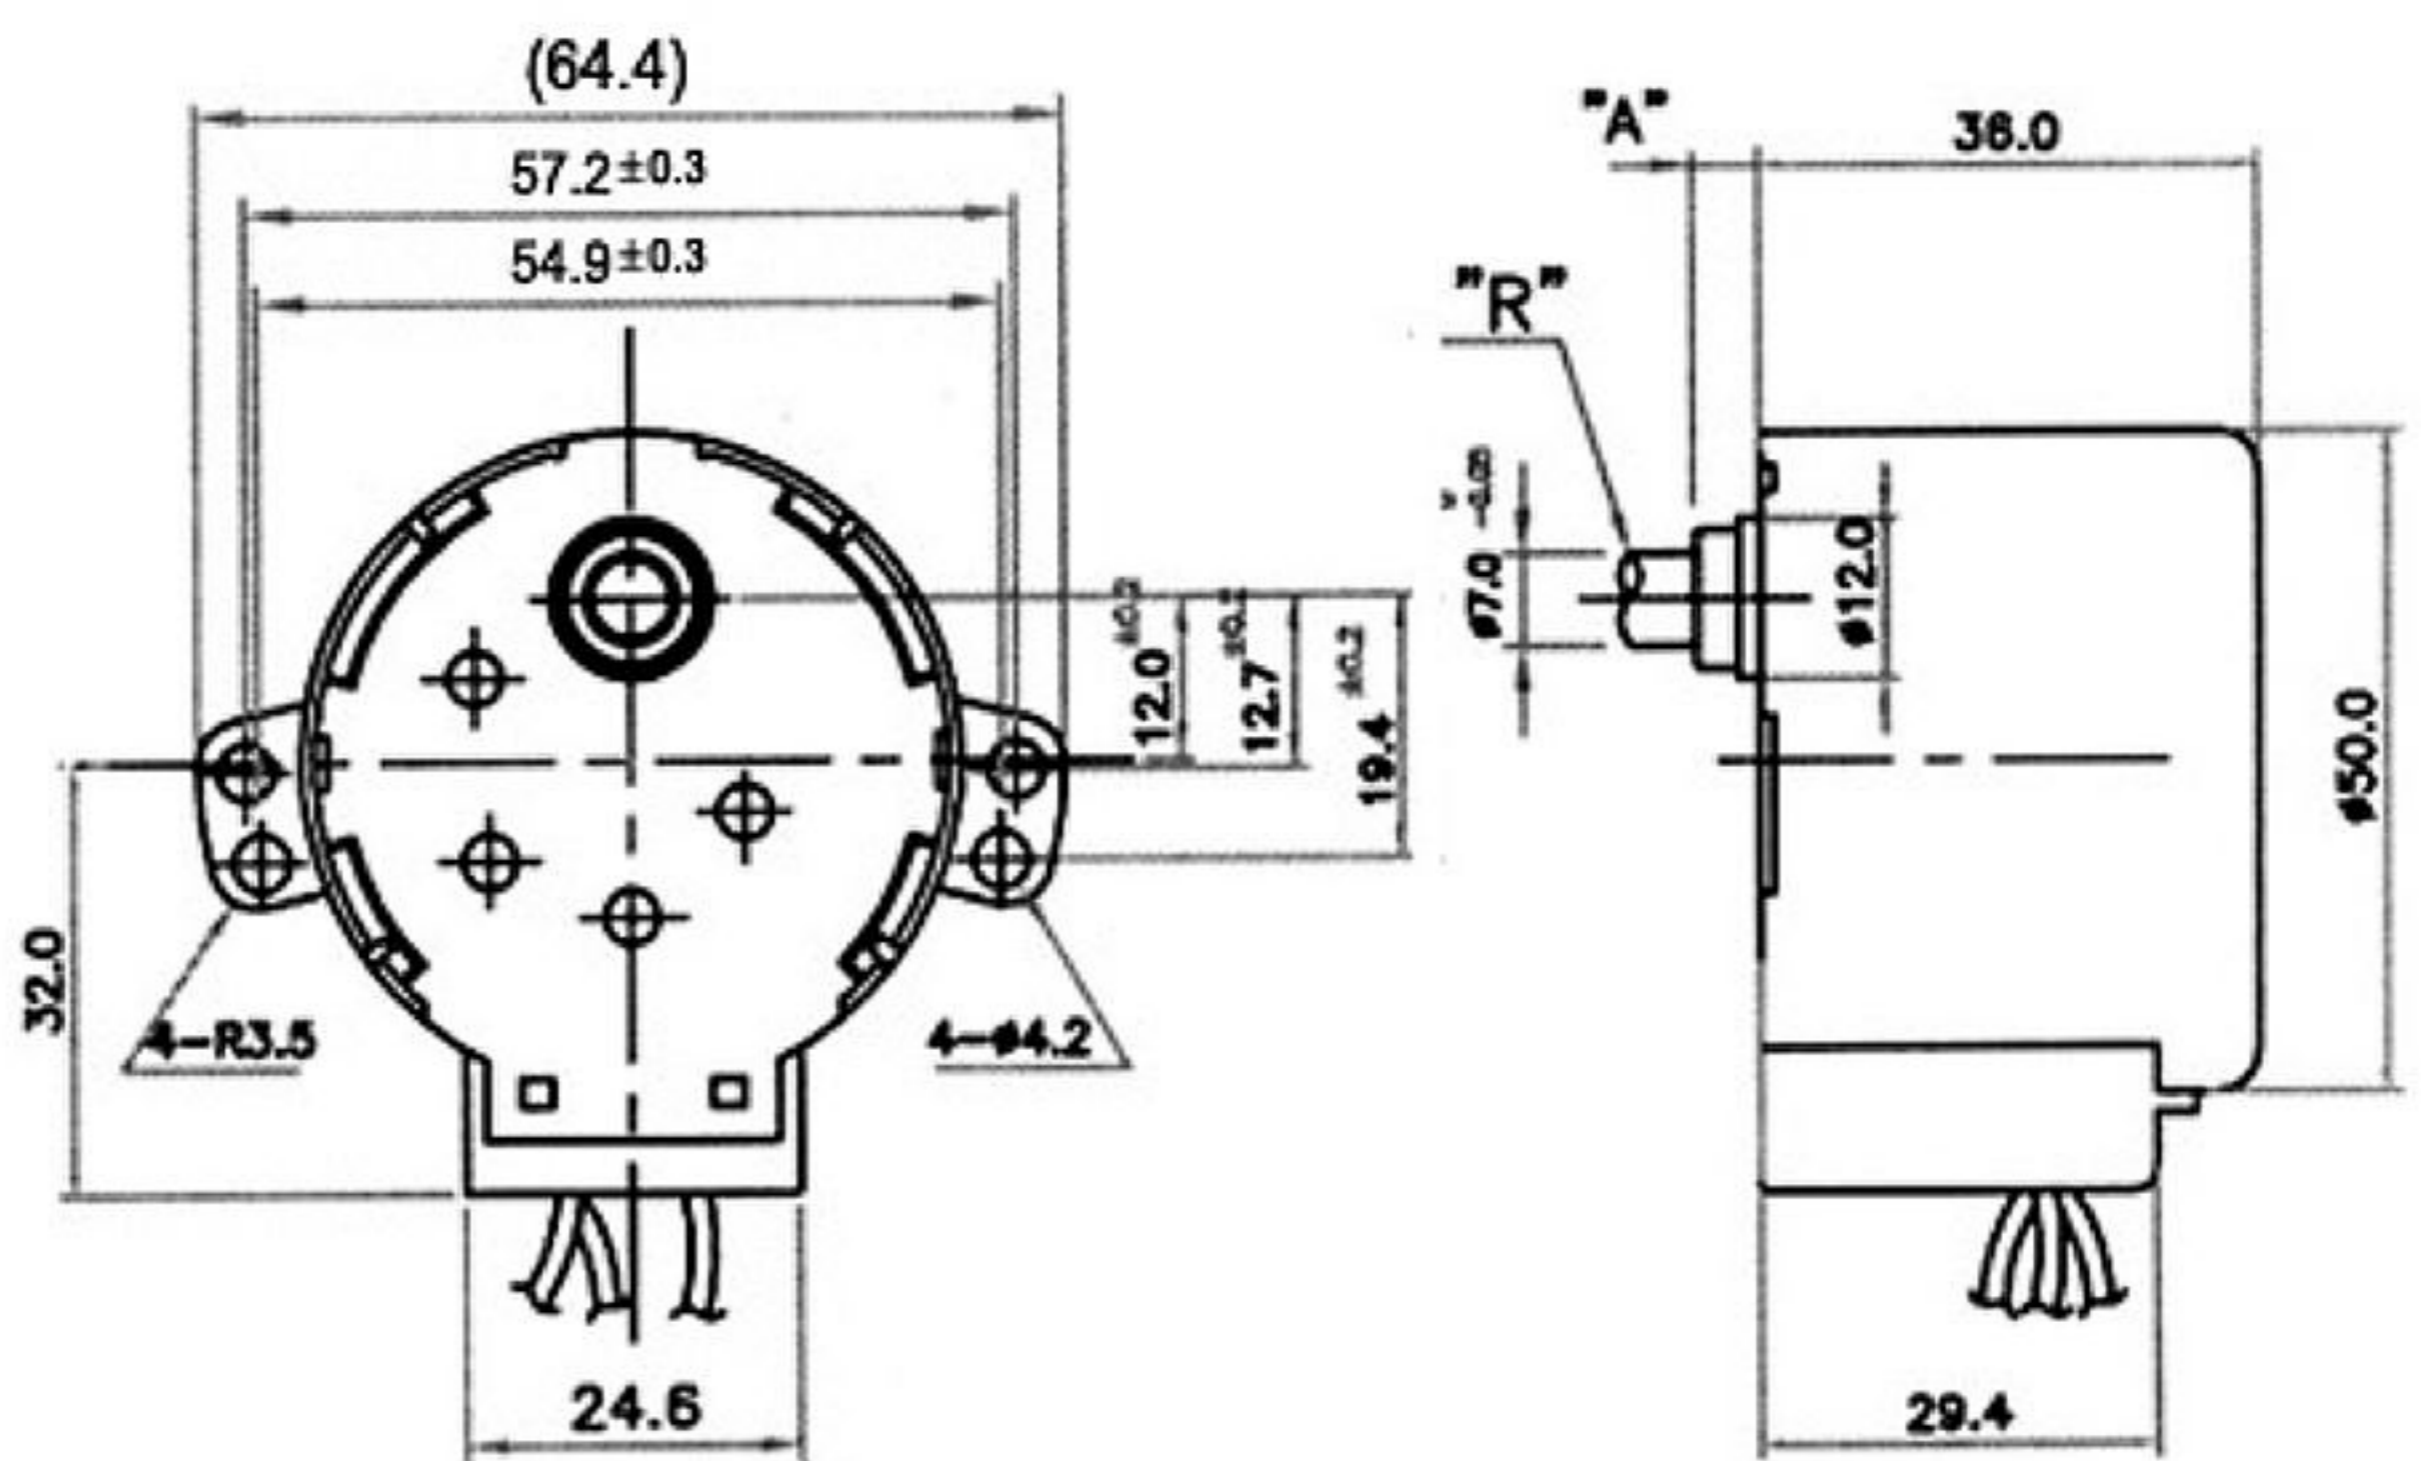

Application : Laminator, etc.

SPECIFICATION

Model	Rated voltage	Input		Shaft Speed		Stalling torque (Kgf-Cm)	Direction
		50Hz	60Hz	50Hz	60Hz		
NYM-36H	AC100V AC110~120V AC220~240V	6.0 W	5.5 W	2.5 rpm	3.0 rpm	12.0 Min	CW (시계) CCW (반시계)
				3.3 rpm	4.0 rpm	16.0 Min	
				5.0 rpm	6.0 rpm	12.0 Min	
				8.3 rpm	10.0 rpm	8.0 Min	
				12.5 rpm	15.0 rpm	6.0 Min	
				30.0 rpm	36.0 rpm	4.0 Min	
				50.0 rpm	60.0 rpm	2.0 Min	
				100.0 rpm	120.0 rpm	1.0 Min	

MATERIAL OF SHAFT("R"), BUSHING("A") DIMENSIONS

Shaft("R"), Materials	Bushing("A")
<p>Steel</p>	t 2.0 t 4.0 t 8.4
<p>Steel Mold</p>	